


Commercial Tile

Expressions™
by Tarkett

2007



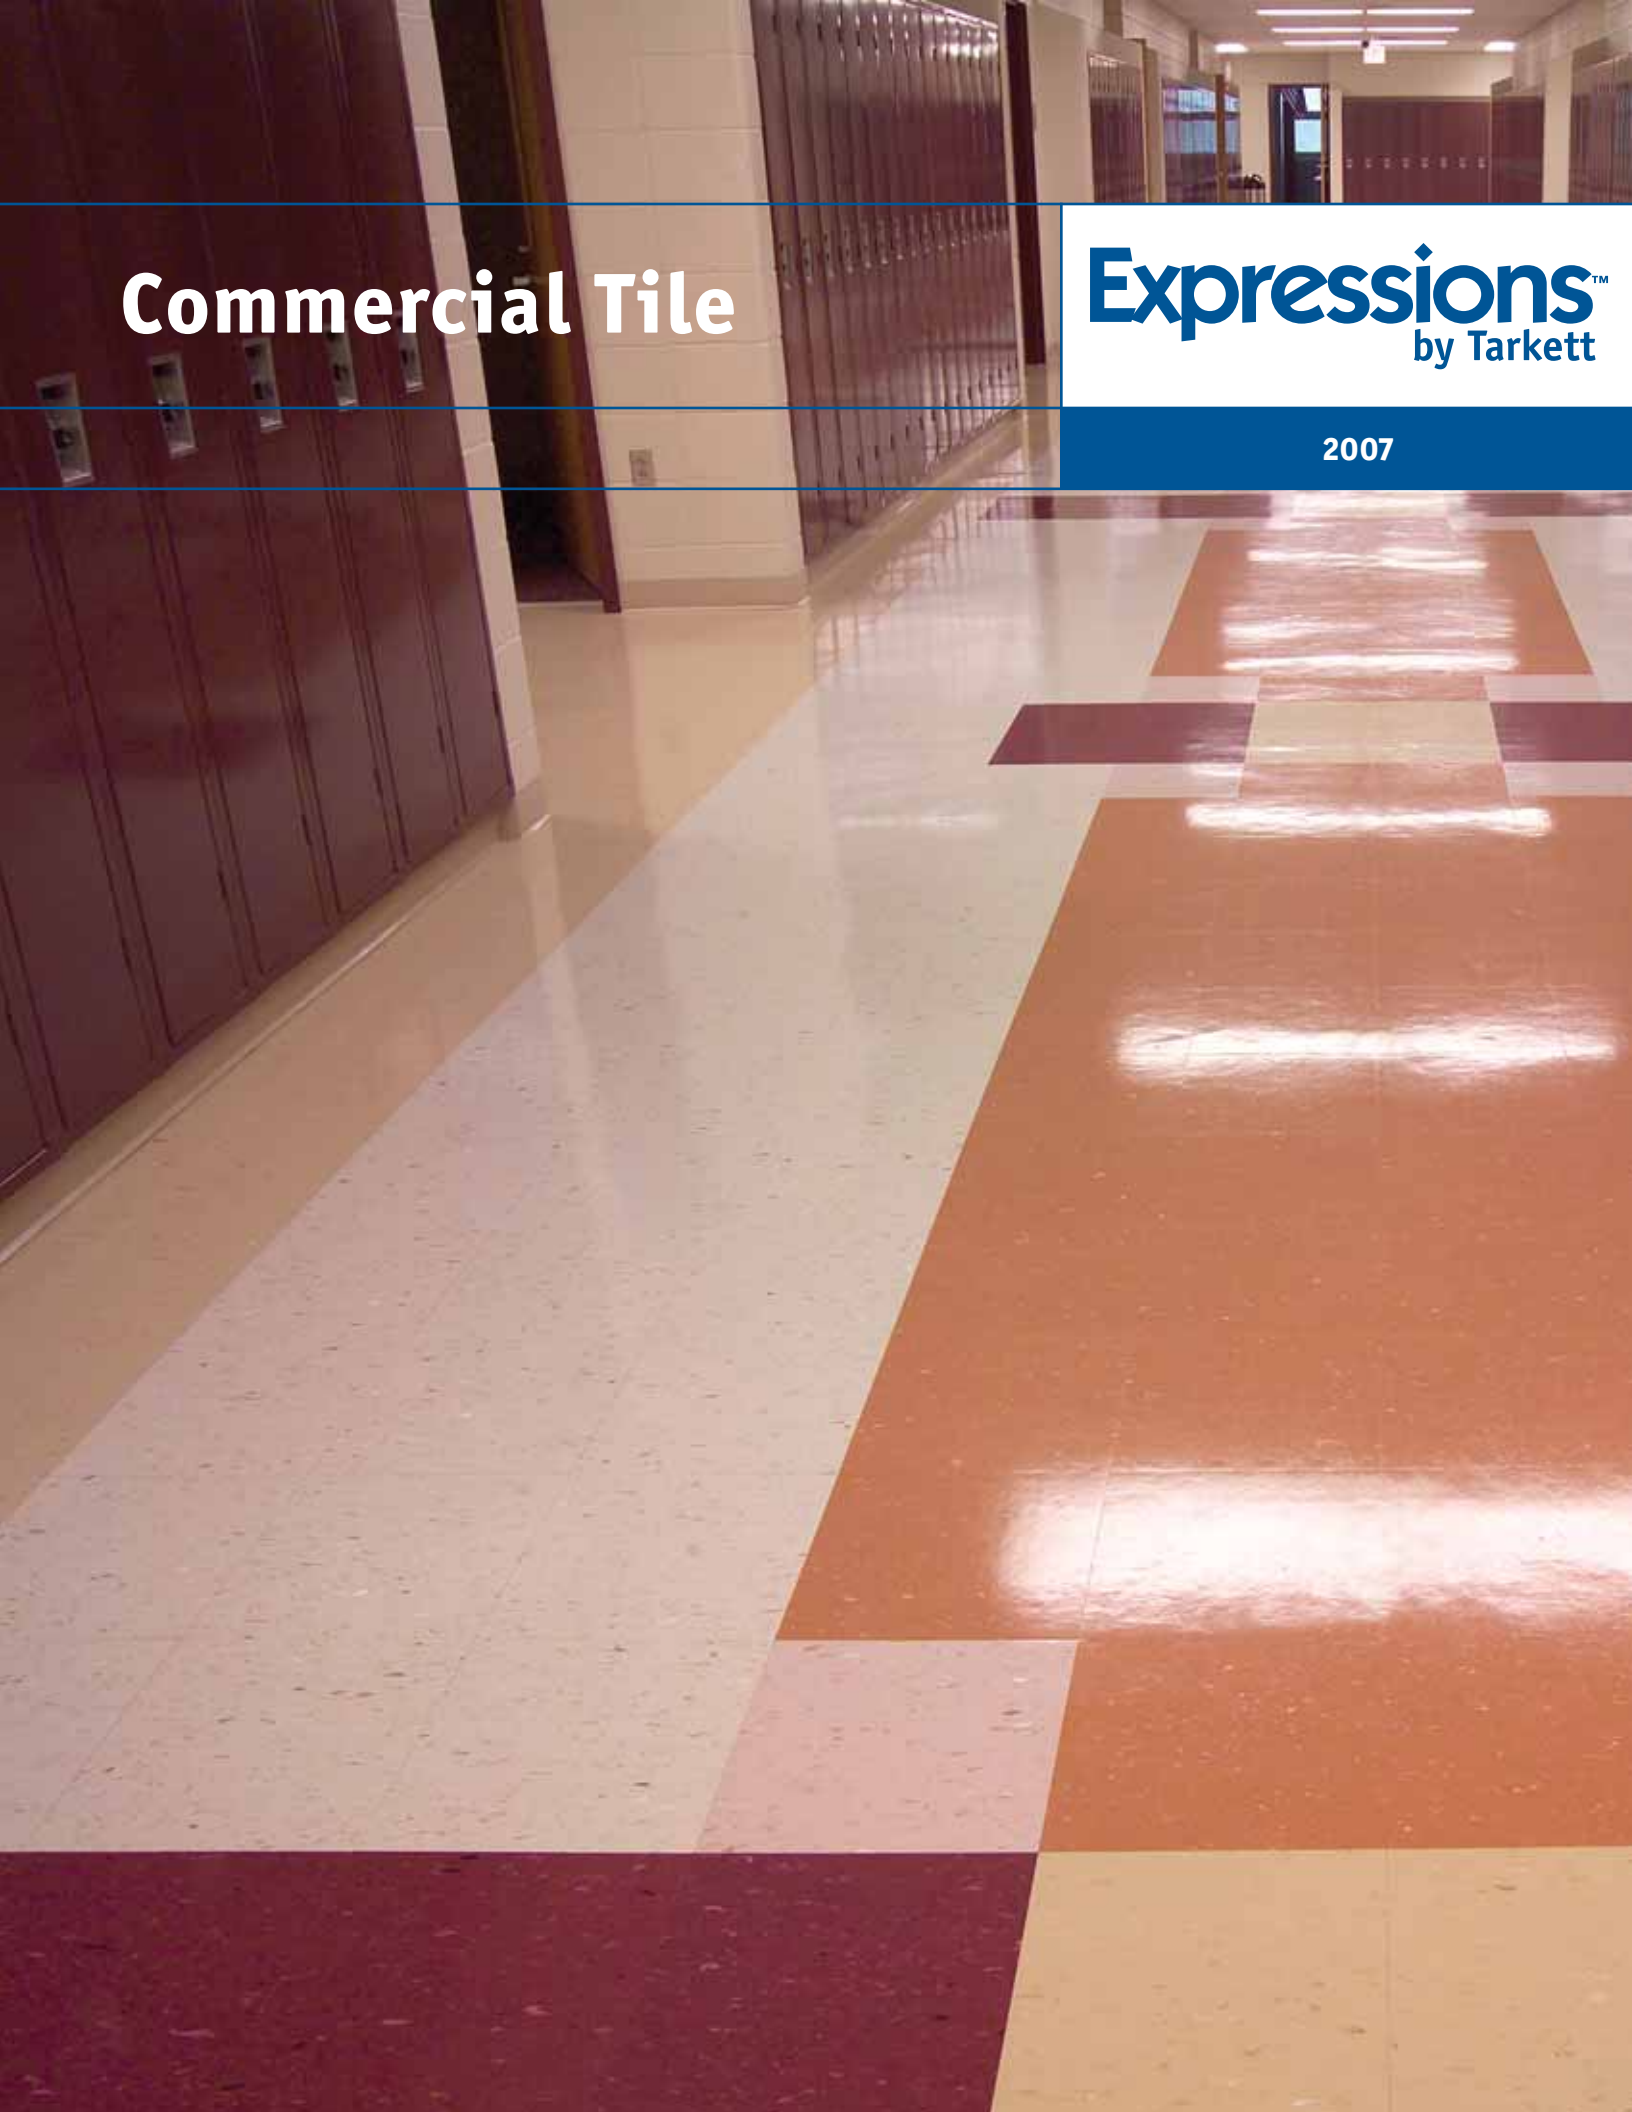

Environmental Perspective

Mission Statement

Through responsible and transparent decisions and actions of continuous improvement, Tarkett is committed to the betterment of the environment.

Think Long-term

We believe it is imperative to make prudent use of available natural resources in order to reduce our impact on the environment.

- Tarkett uses materials that contain recycled content
- Tarkett flooring contains up to 35% recycled content, depending on the product

Think Air Quality

We believe it is very important to maintain high standards for indoor air quality. Research has shown indoor air quality directly affects human health and performance.

Think to Reuse

Tarkett offers a reclamation program for its products and samples. Installation waste usually ends up in landfills, but not with Tarkett's reclamation program.

Think Dedication

Tarkett is dedicated to the community and the environment through group memberships.

- United States Green Building Council (USGBC)
- American Society for Testing and Measurement (ASTM)
- American Institute of Architects (AIA)
- National Association of Floor Covering Distributors (NAFCD)
- Resilient Floor Covering Institute (RFCI)



Tarkett Environmental Initiative

RE  USE

Composition Tile

Rock-solid reasons for using it.

Our vinyl composition tile is mostly made up of natural limestone, available in abundant supply throughout the world.

- VCT composed of 85% natural limestone.
- Other than those occurring naturally no heavy metals are used in the production of VCT.

Our eco-friendly processing

The production of VCT entails the following:

- It is a closed-loop process.
- The mining, transport and utilization of our raw materials are clean and relatively non-polluting.
- Multiple manufacturing facilities lower our transportation costs.

Green means VCT is good to go, again and again

Developed by the National Institute of Standards and Technology, the BEES (Building for Environmental and Economic Sustainability) model measures performance of a given material or product by using a life cycle assessment approach.

The BEES model has consistently given composition tile its highest rating. VCT is simply one of the best products available for overall floorcovering performance.

Green? You bet:


- All adhesives are VOC-free and solvent-free.
- The production of VCT produces very little physical waste.
- In-process scrap is incorporated back into manufacturing process.
- Long life – 20 or 30 years – reduces need to replace, thus saving money and energy.

Floor Score Program

This program, developed by the Resilient Floor Covering Institute (RFCI) in conjunction with Scientific Certification Systems (SCS), tests and certifies flooring products for compliance with indoor air quality emission requirements adopted in California.





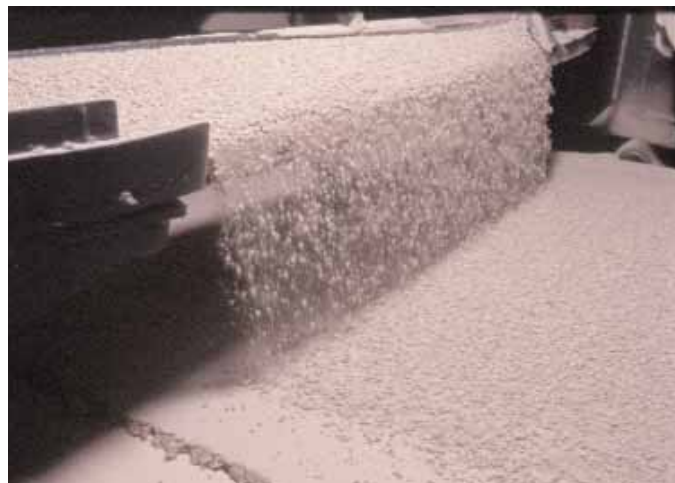















































A flooring product bearing the Floor Score seal has been independently certified by SCS to comply with the volatile organic emissions criteria of the California section 01350 program and qualifies for use in high performance schools and office buildings in California.


Tarkett products have Floor Score certification through Scientific Certification Systems and meet the VOC emissions criteria of the California Section 01350 program.



Standard VCT




Gray							
	1318 White/Black	1314 White/Gray	1626 Dove	1344 Dawn Gray	1618 Titanium	1324 Cool Gray	1364 Dark Gray
Beige							
	1317 White/Beige	1327 Almond/Multi	1603 Palomino	1337 Desert Tan	1347 Beige	1367 Sierra Beige	1356 Oatmeal
Taupe							
	1315 Neutral White	1322 White/Multi	1345 Beige Taupe	1365 Dark Taupe	1376 Copper	1396 Brown	1622 Brownie
Green							
	1312 White/Green	1615 Fresh	1613 Serene	1342 Cool Green	1610 Mermaid	1601 Willow	1614 Serpent
Blue							
	1310 White/Blue	1323 Playful White/Multi	1609 Haze	1350 Blue Lagoon	1616 Electric	1360 Real Blue	1370 Hudson Blue
Violet							
	1320 Refined White/Multi	1625 Ballerina	1627 Wisteria	1617 Eggplant			
Red							
	1319 Russet White	1359 Orange	1621 Mango	1620 Cardinal	1628 Wine	1379 Red	
Yellow							
	1316 Carnation White	1326 Parchment/Multi	1624 Maize	1619 Intense	1605 Acorn	1336 Yellow	1607 Suede



1374 Charcoal



1328 Black/White



1392 Spruce



Expressions Standard VCT incorporates 8 color families and 55 colorways to provide ultimate value in design, function and cost.

Technical data	Standard VCT
Type of floor covering	Standard Vinyl Composition Tile
ASTM F 1066	Class 2 Through Pattern
Smoke Density	ASTM E 662 <450
Flammability	ASTM E 648 Class 1 >0.45 CRF
Static load limit	ASTM F 970 125 psi
Slip Resistance	ADA Compliant >0.6 COF
Thickness	1/8"
Colors	55
Adhesive	100
Warranty	5 Year Limited
Maintenance	Floor Care System
Tile Size	12" x 12"
Quantity	45 tiles per ctn - 45 sq. ft. (4.18 m ² per ctn)
Weight	64 lbs per ctn (29 kg)

Color, shade and pattern may vary as this is a natural product.

Premium VCT



True Step Slip Retardant Tile

Ideal for facilities like grocery stores where patron safety and slip resistance are major concerns. Textured surface combined with a through the thickness hard-particle composition provides the ultimate in slip retardant flooring.



TS901 Beige




TS902 Neutral Brown




TS903 Blue



TS904 Neutral Green



TS905 Green



TS906 White



TS907 Gray



TS908 Onyx

Color, shade and pattern may vary as this is a natural product.

Technical data		True Step Slip Retardant Tile
Type of floor covering		Premium Vinyl Composition Tile - Slip Retardant
ASTM F 1066		Class 2 Through Pattern
Smoke Density	ASTM E 662	<450
Flammability	ASTM E 648	Class 1 >0.45 CRF
Static load limit	ASTM F 970	125 psi
Slip Resistance	ADA Compliant	>0.8 COF
Thickness		1/8"
Colors		8
Adhesive		100, 940 [†]
Warranty		5 Year Limited
Maintenance		Floor Care System
Tile Size		12" x 12"
Quantity		45 tiles per ctn - 45 sq. ft. (4.18 m ² per ctn)
Weight		64 lbs per ctn (29 kg)

[†]In areas exposed to temperature fluctuations and occasional topical moisture.



Details™ & Feature Strips

Solid accent colors present unlimited design opportunities. They work perfectly in insets and borders with Expressions Standard and Premium VCT, Tarkett Stoneworks, True Step and other products in the Tarkett family.



6916-3 Yellow



6919-3 Red




6915-3 Burgundy



6910-3 Blue




6917-3 Beige



6913-3 White



6914-3 Grey



6918-3 Black

FS2496916-A Yellow, 1/4" width

FS2496916-B Yellow, 1/2" width

FS2496916-C Yellow, 1" width

FS2496916-D Yellow, 2" width

FS2496916-F Yellow, 4" width

FS2496916-H Yellow 6" width

Color, shade and pattern may vary as this is a natural product. Not recommended for fields of overall color, because slight color shading among the tiles may occur. As with any solid color flooring, extra maintenance attention is required.

Feature Strips

FS2496916 Yellow

FS2406919 Red

FS2926915 Burgundy

FS2366910 Blue

FS2176917 Beige

FS3046913 White

FS2886914 Grey

FS3006918 Black



Technical data		Details & Feature Strips		Feature Strips	
Type of floor covering		Premium Vinyl Composition Tile		Sizes, Quantities & Weights	
ASTM F 1066-99		Class 1 Solid Color		1/4" x 24" 100 pieces per ctn 200 lin. ft. (60.96 lin. m per ctn) 6 lbs per ctn (2.7 kg)	
Smoke Density	ASTM E 662	<450		1/2" x 24" 75 pieces per ctn 150 lin. ft. (45.72 lin. m per ctn) 9 lbs per ctn (4 kg)	
Flammability	ASTM E 648	Class 1 >0.45 CRF		1" x 24" 50 pieces per ctn 100 lin. ft. (30.48 lin. m per ctn) 11.5 lbs per ctn (5.2 kg)	
Static load limit	ASTM F 970	125 psi		2" x 24" 25 pieces per ctn 50 lin. ft. (15.24 lin. m per ctn) 12 lbs per ctn (5.4 kg)	
Slip Resistance	ADA Compliant	>0.6 COF		4" x 24" 15 pieces per ctn 30 lin. ft. (9.14 lin. m per ctn) 14 lbs per ctn (6.3 kg)	
Thickness		1/8"		6" x 24" 15 pieces per ctn 30 lin. ft. (9.14 lin. m per ctn) 21 lbs per ctn (9.5 kg)	
Colors		8			
Adhesive		100			
Warranty		5 Year Limited			
Maintenance		Floor Care System			
Tile Size		12" x 12"			
Quantity		45 tiles per ctn - 45 sq. ft. (4.18 m ² per ctn)			
Weight		64 lbs per ctn (29 kg)			

Premium VCT



Tarkett Stoneworks™

The dramatically different premium tile that combines contrasting granite with soft flowing marble. And the subtle directional design of Tarkett Stoneworks allows straight or turned installation.



3017 Feldspar



3016 Pearl



3027 Limestone



3036 Amber



3019 Rose Quartz



3026 Granite Red



3010 Sapphire



3012 Peridot



3032 Jade



3011 Diamond



3014 Quartz



3015 Tourmaline



3018 Onyx



- Combines contrasting granite with soft, flowing marble
- Subtle directional design allows straight or turned installation
- Unique construction provides multi-dimensional deep stone look
- Various levels of color and graining provide the best concealment of traffic patterns in heavy use areas


Color, shade and pattern may vary as this is a natural product.

Technical data		Tarkett Stoneworks™
Type of floor covering		Premium Vinyl Composition Tile
ASTM F 1066		Class 2 Through Pattern
Smoke Density	ASTM E 662	<450
Flammability	ASTM E 648	Class 1 >0.45 CRF
Static load limit	ASTM F 970	125 psi
Slip Resistance	ADA Compliant	>0.6 COF
Thickness		1/8"
Colors		13
Adhesive		100
Warranty		5 Year Limited
Maintenance		Floor Care System
Tile Size		12" x 12"
Quantity		45 tiles per ctn - 45 sq. ft. (4.18 m ² per ctn)
Weight		64 lbs per ctn (29 kg)



Basketball & Shuffleboard Kits

This Basketball Court Diagram is in accordance with the official specifications of the National Federation of State High School Associations, Kansas City, MO., as revised in January 1996. They can be contacted at 816-464-5400. If you wish to have additional parts to make other size courts or ones that conform to different specifications, please contact your distributor to order these items as a Custom Inset Request at an additional charge.

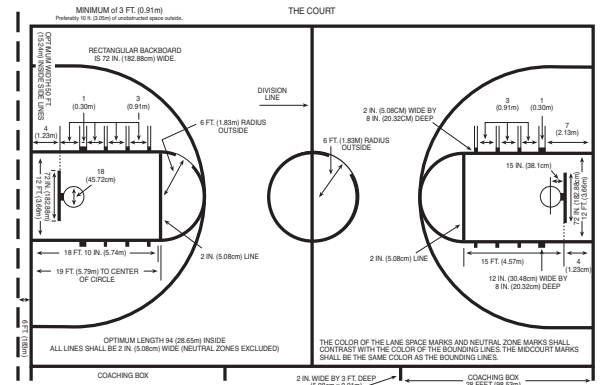

Basketball Court Kit – KT309

STANDARD COURT DIMENSIONS:


College - 50' x 94' High School - 50' x 84' Junior High School - 42' x 74'
 Each kit contains sufficient material for a standard college court including all the necessary Feature Strips and curved segments for straight boundary lines, circular markings and three-point goal markings. (Field product sold separately.) To create high school or junior high courts, just reduce the number of segments to form the standard perimeter dimensions listed above.
 AVAILABLE IN BLACK. Custom colors are available on a special quotation basis.

BASKETBALL COURT KITS COME IN 3 CARTONS

- Carton 1 **6' Circles/Strips** contains:
 - Instructions and court diagram
 - Arc for 6' Radius Circles (32 pieces)
 - 2" x 24" Feature Strips (10 pieces)
- Carton 2 **Feature Strips** contains:
 - Bundle of 10 cartons of 2" x 24" Feature Strips, 26 pieces each (260 pieces total)
- Carton 3 **3 Pt. Arc/Free Throw Lanes** contains:
 - Arc for 19' 9" radius circle (66 pieces plus 1 extra)
 - Arc for 6' radius circle (8 pieces)
 - 8" x 12" blocks for Free Throw Lanes (4 pieces)

Shuffleboard Court Kit – KT317

Each kit contains sufficient material for a standard shuffleboard court including installation information and tile pieces. (Field product to be ordered separately.) This kit contains 3 colors—red/white/blue numbered triangular shape pieces. Field tile and black feature strip (border tile) are sold separately. Contact your distributor. Other solid tile colors are available as a special order.

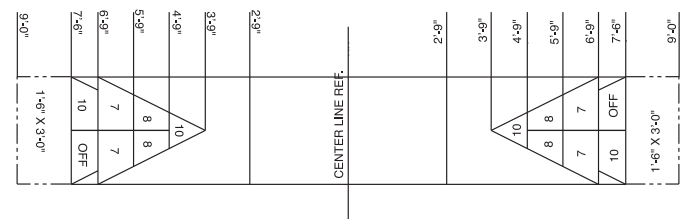

The illustration details the layout for a Standard Shuffleboard Court Kit. The kit contains solely the pre-cut and lettered pieces. Feature Strips 1/2" or 1" wide can be purchased for boundary lines. 50 linear feet required.

Maintenance & Adhesives

The Commercial Floor Care Maintenance System contains products specially formulated for use on Expression floors. Use of these products further validates Tarkett's flooring warranties.

All of our adhesives have been specially formulated and tested to provide superior results when used as recommended. Use of complete Tarkett branded installation systems, flooring material, floor preparation products and adhesives ensures Tarkett full warranty coverage on our commercial flooring products.

C302 FLOOR CLEANER

Commercial Floor Cleaner is a nearly neutral pH cleaner. It is especially useful with automatic floor scrubbers because of its very low foaming characteristic. It removes the dirt, not the polish.



Technical data	C302
Size	2.5 Gallon
Quantity	2 per ctn
Weight	44 lbs per ctn (20.0 kg)

100 CLEAR THIN SPREAD ADHESIVE

for Vinyl Composition Tile
Zero TVOC



Technical data	100	
Size	1 Gallon	4 Gallon
Quantity	4 per case	1 pail
Weight	40 lbs per case (18.2 kg)	37 lbs (16.8 kg)

C402 FLOOR STRIPPER

Commercial Floor Stripper is ammonia-free, and may be used on all commercial vinyl floors (except linoleum).



Technical data	C402
Size	2.5 Gallon
Quantity	2 per ctn
Weight	48 lbs per ctn (21.8 kg)

940 POLYURETHANE ADHESIVE

for specialized applications
Zero TVOC



Technical data	940	
Size	1 Gallon	
Quantity	1 pail	
Weight	12 lbs (5.5 kg)	

C502 FLOOR POLISH

Commercial Floor Polish is useful as a dry bright polish, a spray buff polish or a high-speed burnishing product.



Technical data	C502
Size	2.5 Gallon
Quantity	2 per ctn
Weight	43 lbs per ctn (19.5 kg)

C202 MATTE SATIN POLISH

Commercial Matte Satin Polish is a high durability, low gloss acrylic polish for restoring luster to linoleum and other commercial flooring.



Technical data	C202
Size	2.5 Gallon
Quantity	2 per ctn
Weight	44 lbs per ctn (20.0 kg)



All of our plants are ISO Certified.



2728 Summer Street . Houston, Texas . 77007

tarkett-commercial.com



If you're an architect, interior designer or corporate specifier, experience our products first-hand. Just call 1-800-558-2240. Or visit our web site www.tarkett-commercial.com for more solutions.